


Silex ClickShow HDMI Button

- **Clientless: No driver installation - No CPU usage - OS agnostic**
- **Device agnostic: Share from any device with a standard display port (Laptops, DVD players...)**
- **Smooth and high-quality video sharing**

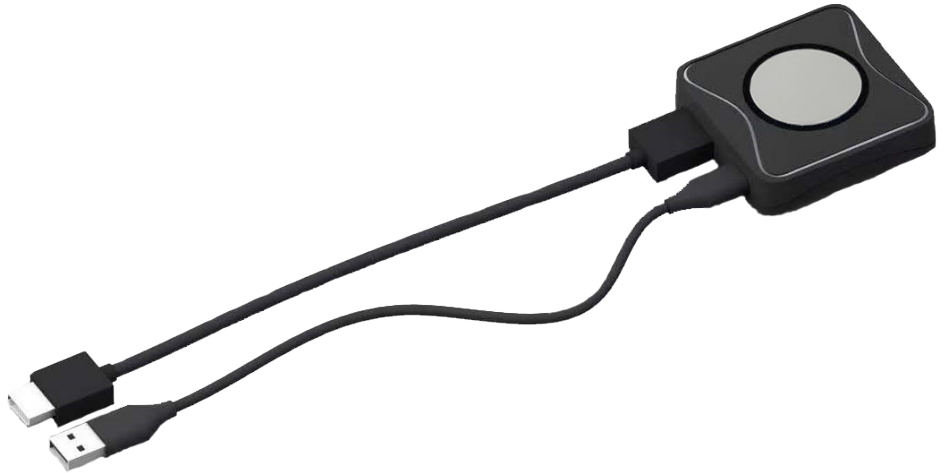

Silex ClickShow HDMI Button offers great advantages when it comes to sharing content wirelessly.

It doesn't just offer a very easy sharing experience, but it also transmits a very smooth and high-quality video feed without the need to run any driver from the button.

Simply plug the ClickShow HDMI Button into your laptop, or any device with a standard display port and click to start sharing on the meeting room main display. Your ClickShow Button is device agnostic and OS agnostic.

Multiple ClickShow Buttons can connect to the same ClickShow Base Unit, and depending on the Base Unit, many users can share on-screen at the same time.

The HDMI Button comes with a USB cable required to power the button and for touch back control.

Universal Connectivity Kit

The HDMI Button comes with an HDMI cable to connect to HDMI ports, but it can also connect to standard display ports using one of the following connectors from the universal connectivity kit included: Thunderbolt 3, DP, Mini-DP, Mini-HDMI



Specifications

| | |
|--------------------------------------|---|
| Interface | 1 x HDMI for audio/video input 1 x USB for Power, upgrade and touch back |
| Devices compatibility | Compatible with any PC and operation system Compatible with any device with an HDMI output |
| Driver installation | Not required |
| ClickShow devices compatibility | All ClickShow models |
| Input resolution | Up to 1920x1080P60 |
| Encoding resolution | Up to 1920x1080P30 |
| Audio | 44.1KHz - 48KHz - 16bits PCM, stereo |
| Wireless transmission protocol | Wireless HDMI over IEEE 802.11ac - 802.11n |
| Wireless transmission speed | Up to 867Mbps |
| Wireless transmission distance | 30m visual distance |
| Wireless transmission frequency band | 5G and 2.4G |
| Transmission delay | less than 150ms |
| Reverse control | 10 points touch control Compatible with WIN7-WIN8.1-WIN10 |
| Connector type | HDMI Supports Thunderbolt 3, DP, Mini-DP and Mini-HDMI via additional connectors |
| Cables | 1 x HDMI cable 1 x USB cable |
| Dimensions | 64mm x 63mm x 20mm |
| Power consumption | 5V/500mA - Average:1.5W |
| Temperature | Running: +5°C to +40°C Storage: -20°C to +60°C |
| Humidity | Running and Storage: 0 to 90% relative humidity, no condensation |