

ClickShow R101

The single click wireless presentation system for huddle rooms.




Content sharing is one of the essential elements that contributes to the successful outcome of a meeting. Technology plays an important role in easing the sharing process or complicating it. With Silex ClickShow, sharing is as easy as one, two, three. The ClickShow-R101 wireless presentation solution is designed for small collaborative environments and frees your space from the traditional wiring.

With this collaboration system, sharing on the room's display is made simple from any laptop or mobile device. No more setups or cable's compatibility concerns to worry about, just click to show your content on the main screen.

Plug, click and show

The ClickShow-R101 brings the wireless presentation experience to the huddle room, small meeting room or class room. It offers the simplest wireless presentation setup for a single image display and can be used with almost any display or projector for quick and easy presentation sharing from any device.

Sharing from laptops can be done using ClickShow soft button application or the ClickShow button. The latter is used by simply plugging it in the HDMI or USB port, running the ClickShow app and clicking to show the content. From Android smartphones and tablets, install the ClickShow soft button app then click to show your content. From iOS devices, simply use AirPlay or the button for Macs.

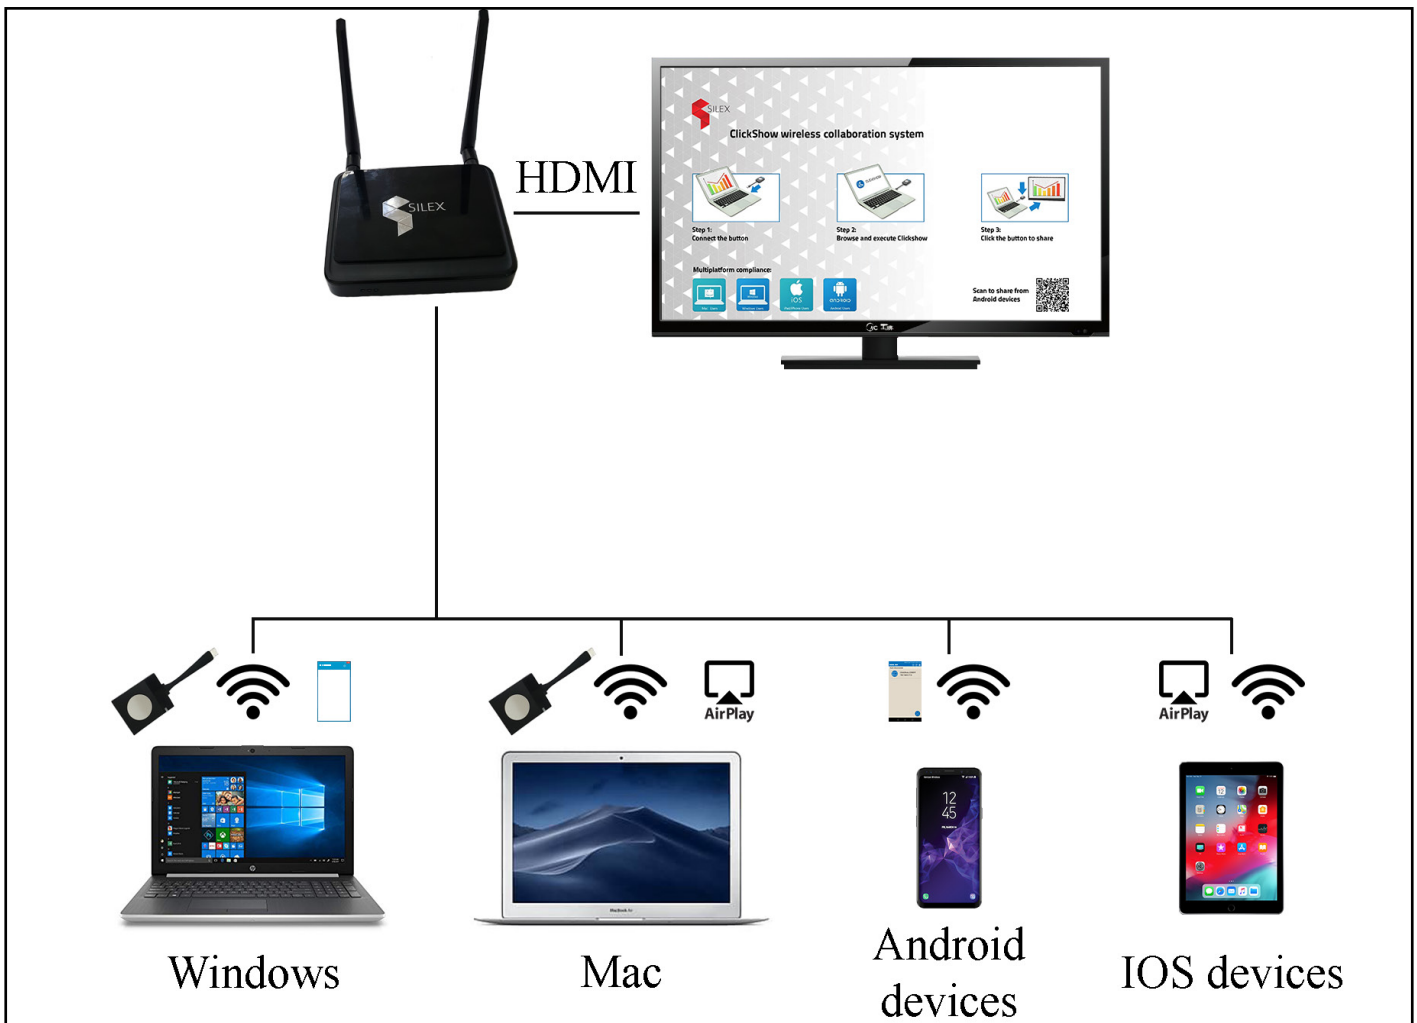

Main features

- One user sharing at a time
- Delivered with 1 HDMI or USB Type A button
- Can take up to 8 buttons
- Unlimited ClickShow soft button connections
- Easy and quick click-to-switch users
- Adjustable display ratios, including 4:3, 16:9, 16:10
- Share from laptop, tablet or smartphone
- Supports AirPlay mirroring for MAC, iPhones and iPads
- Reverse control from a touch screen
- HDMI output
- 3.5mm Audio output

Specifications

Interfaces:

- 1 x HDMI Output
- 1 x USB
- 1 x Ethernet LAN
- 1 x 3.5mm mini jack socket

Operating systems and wireless presentation protocols compatibility:

- Windows 7/8.1/10 32 and 64 bits,
- MAC OS X 10.10/10.11/10.12 and above
- Compatible with airplay for iOS9/iOS10/iOS11, OS X 10.10/10.11/10.12 and above
- Compatible with Android 5.0 and higher version (APP installation required)

Number of simultaneous sources on screen:

1 source from Windows, MAC, android and iOS devices

Number of simultaneous connected buttons: 8

Reach: 20 meters

Extended desktop presentation: Supported

Reverse control: Supported

Video output:

- Output type: 1 HDMI
- Output ratio: same as source screen
- Output resolution: 11 available adaptative resolutions up to 1920 x 1200 P60

Video input:

- Up to 4K (3840x2160)
- Encoding resolution up to 1920x1080
- Frame rate up to 30fps

Audio output:

- Via HDMI: digital audio, sample rate 44.1Khz, stereo
- Via Audio Jack 3.5mm: analog audio

Both audio interfaces output the same audio signal simultaneously

USB interface:

- Button pairing
- Local firmware upgrade
- Bootup/standby image setting

Devices compatibility:

- iOS devices (using Airplay)
- MAC (using ClickShow Button or Airplay)
- Android devices (using ClickShow application)
- Windows laptops (using ClickShow button or ClickShow App)

Wireless connection:

- Wireless transmission protocol: 802.11ac/n
- Dual antenna
- Frequency band: 2.4Ghz (11 channels) and 5ghz (9 channels)
- Network speed: up to 867Mbps
- Authentication protocol: WPA2-PSK

WLAN Card:

- Built-in wireless/wired bridging with priority for wired
- 2.4G, 1T1R, 150Mbps

Management:

- Device configuration from web interface
- Firmware update from USB or remote network
- Centralized management software for multiple devices on the same LAN

Presentation code:

When Pin code is enabled, android, AirPlay and windows senders will require the code

Button models

- HDMI
- USB type A
- USB type C (Q1/2020)

Weight: 200 g

Dimensions (HxWxD): 2 x 14 x 11 cm

Power consumption:

12W/1A, average power consumption 5W

Temperature and humidity:

- Operation: +5°C ~ +40°C, 0 ~ 90% relative humidity, no condensation
- Storage: -20°C ~ +60°C, 0 ~ 90% relative humidity, no condensation



© 2019 SillexPro. All rights reserved. SillexPro and any SillexPro product or service name or logo used herein are trademarks of SillexPro. All other trademarks used herein belong to their respective owners. The trademarks and logos displayed herein may not be used without the prior written consent of SillexPro or their respective owners. No portion hereof may be reproduced or transmitted in any form or by any means, for any purpose other than the recipient's personal use, without the express written permission of SillexPro.

www.Sillexpro.com